


City of Rockingham

7/2/2017

237 238 239

227

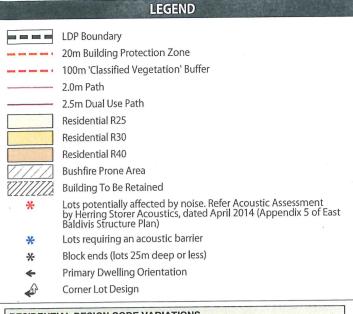

RESIDENTIAL DESIGN CODE VARIATIONS

- The provisions of Town Planning Scheme No.2 (TPS2) and State Planning Policy 3.1 Residential Design Codes (R-Codes) are varied as detailed within this Local Development Plan (LDP). The requirements of the R-Codes and TPS2 must be satisfied as provided in this LDP, except where provided in accordance with the City's Planning Policy 3.3.20 Residential Design Codes. Consultation with adjoining or other land owners to achieve a variation to the R-Codes, as provided for by this LDP is not required.

SETBACKS

- Lots 120-123, Lots 180-185, Lots 391-394 and Lots 402-403 7.0m (in accordance with 20m
- Building Protection Zone. No average setback applies)

 2. All other lots 2.0m minimum to 4.0m maximum (no average setback applies).

- Secondary

 1. Secondary Street Setback 1.0m minimum.

 2. Laneway Setback 0.5m including garage, carport and eaves

Other

1. Lot 173 and Lot 178 Western Boundary Setback - 20.0m (no average setback applies)

STREETSCAPE (REAR LOADED - LANEWAY)

- 1. Garages and Carports 0.5m from laneway.
- STREETSCAPE (FRONT LOADED STREET) Garages and Carports – 4.5m minimum from Primary Street, which may be reduced to 3m at 'block ends' where lots have a depth of 25m or less, providing the garage or carport is located at least
- 0.5m behind the dwelling.

 Street Surveillance Garage doors and supporting structures must not exceed 6m on lots of be

2. Street Surveillance – Garage doors and supporting subcoded make the surveillance – Garage doors and supporting subcoded make the surveillance of the surveillance

boundary to both	Sidos, Borilla tile i tillari -	
OPEN SPACE		
Open Space Variation	ns (by lot size)	
Lot Size	Minimum Open Space (% of site)	Minimum Outdoor Living Area (m²)
180m ² - 220m ²	30%	20m ² uncovered with 4m minimum dimension
221m ² - 260m ²	30%	24m ² uncovered with 4m minimum dimension
261m ² – 300m ²	35%	24m ² uncovered with 4m minimum dimension
301m ² – 375m ²	40%	30m ² uncovered with 4m minimum dimension
More than 375m ²		As per R-Codes

SITE PLANNING AND DESIGN

Solar Access for adjoining sites – R-Codes requirements do not apply, other than where a lot abuts a lot greater than 350m², in which case R-Code requirements apply.

OTHER PROVISIONS

Noise
Buildings on the LDP lots identified as being noise affected must be designed and constructed in accordance with a site specific Acoustic Report prepared by a qualified acoustic consultant demonstrating that the design of the dwelling complies with the 'Quiet House Design' provisions of the Western Australian Planning Commission's State Planning Policy 5.4 – Road and Road Transport Noise and Freight Considerations in Land Use Planning.


Bush Fire

Buildings on the lots identified as being Bushfire Prone Areas are to be constructed in accordance with AS3959. The approved Fire Management Plan, prepared by Bushfire Safety Consulting, dated 15 March 2014, requires the following Bushfire Attack Levels

Lot	BAL
124-128, 134-138, 158-161, 174-177, 186-193, 202–204, 395-401, 413-417 & 900	BAL-12.5
173, 178, 180-185, 194, 391-394 & 402- 403	BAL-19
120-123	BAL-29

(ii) No buildings are permitted in the Building Protection Zone. Any structures or fences in the Building Protection Zone must be constructed of non-combustible mate

Baldivis Parks Estate for: Australand



Date: 03/02/2017 Plan: AUSEB-4-004F



Copyright Creative Design & Flaming 1 to pac of this plan may be reproduced in any form without prior consent from CDP All care has been taken in preparation of this plan but no responsibility is taken for any ericos promissions and is subject to change. Areas and cinemisms shown on plan are subject to final survey. Cantegerings depicted on plan are disquariments, or by