

RESIDENTIAL DESIGN CODE VARIATIONS

- The requirements of the Residential Design Codes (R-Codes) are varied as shown on the DAP.
- The requirements of the R-Codes and Town Planning Scheme shall be satisfied in all other matters.
- Consultation with the adjoining or other land owners to achieve a variation to the R-Codes as provided for by the DAP is not required.

Garages/Carports

1. The siting of garages/carports shall comply with the vehicular access restrictions as shown on the DAP.

Boundary Walls

2. Boundary walls are permitted on both side boundaries for all laneway lots. A boundary wall is not permitted adjoining a secondary street road reserve (excluding laneways).
3. Single storey boundary walls are permitted to a maximum height of 3.5 metres for the entire length of the boundary behind the front setback.
4. Two storey boundary walls are permitted to a maximum height of 6.5 metres, the location being restricted to the front 15 metres of the lot boundary behind the front setback.

Setbacks

5. Developments on all laneway lots shall be setback a minimum of 2 metres and a maximum of 4 metres from the primary street. Minor incursions are allowed in accordance with Clause 6.2.2 of the R-Codes.
6. Any single storey wall containing major openings shall provide a minimum 1 metre setback from the side boundary. Notwithstanding front and rear setback requirements, there is no maximum length applied to the wall.
7. Garage rear laneway setback is a minimum of 1 metre with no overhang of eaves into the minimum setback.
8. Dwelling rear laneway setback is a minimum of 1 metre with eaves permitted to overhang 0.5 metre into the minimum setback.

Open Space


9. A minimum of 30% open space applies to all lots included in the DAP.

Outdoor Living Area

10. For all single dwelling lots, an outdoor living area shall be provided in accordance with the R-Codes (clause 6.4.2 A2), with the exception of the permanent roof cover, which is permitted to cover a maximum of two thirds of the outdoor living area.

Overshadowing

11. The overshadowing provision of the R-Codes does not apply.

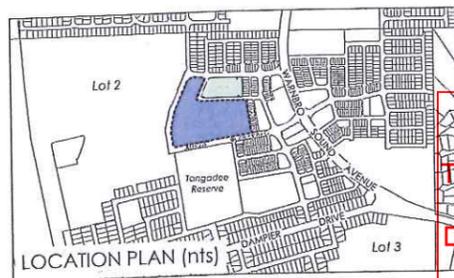

THIS DAP HAS BEEN APPROVED UNDER DELEGATION BY THE MANAGER, STATUTORY PLANNING UNDER CLAUSE 4.23.1 (C) OF THE CITY OF ROCKINGHAM TOWN PLANNING SCHEME NO. 2


MANAGER, STATUTORY PLANNING

24/1/2013
DATE

LOCAL DEVELOPMENT PLAN APPROVAL EXTENDED

This Local Development Plan approval period was extended on 19 October 2025, pursuant to Clause 57 of the Planning and Development (Local Planning Schemes) Regulations 2015, for an additional 5 years.

This LDP will expire on 19 October 2030, unless amended or revoked earlier by the City.

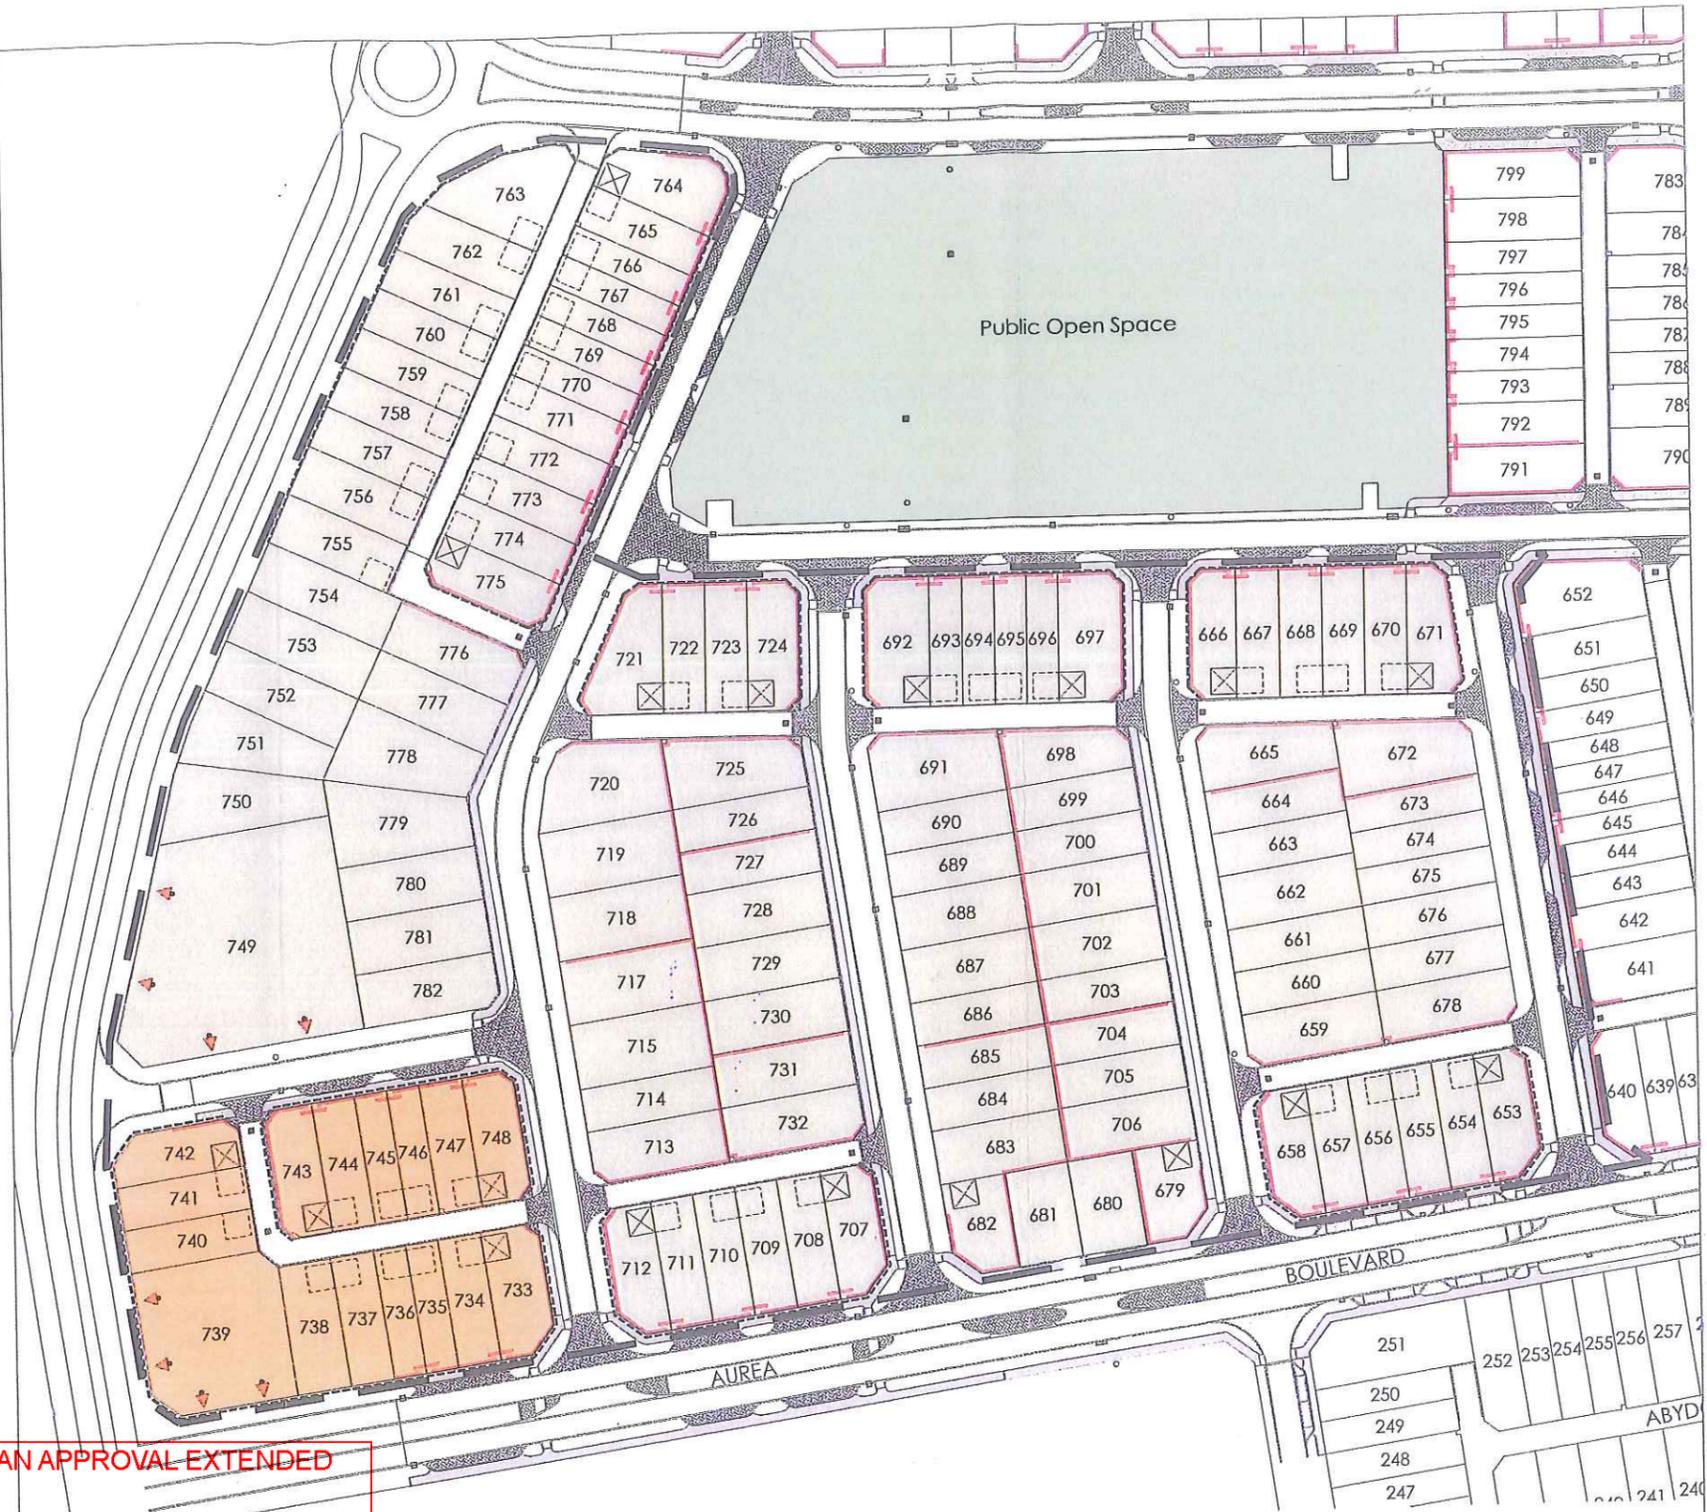

Legend

- DAP Boundary
- - - No Vehicular Access
- Retaining Wall
- Footpath
- R40
- R60
- Nominated Building Orientation

- ⊗ Designated Garage Location
- Preferred Garage Location

- An alternative garage location to the preferred location shown on the plan may be approved by the Manager, Building Services subject to the design meeting the solar design principles, streetscape objectives and other statutory requirements.

- Parking embayments are indicative only. Subject to detail design.



DETAILED AREA PLAN 2
Stage 3 - Aurea Boulevard, Golden Bay
City of Rockingham

..L:\Nogol20111123_Golden Bay LOGO Col.jpg



plan no: 2187-275E-01
scale: nts @ A3
date: 14.01.2013

T: (618) 9382 1233 F: (618) 9382 1127
E: admin@cleplan.com.au
www.cleplan.com.au
L2, 36 ROWLAND STREET SUBIACO WA 6008
PO BOX 786 SUBIACO WA 6004

This plan is current of the revised date & subject to approval, survey & engineering detail. This plan remains the property of CLE ©