


LEGEND:

D	EXISTING DRAINAGE: PIPE, EJP, EGP, ESEP
UGP	UNDERGROUND POWER: LINE, PIT, DOME, LIGHT POLE
T	TELSTRA: LINE, PIT, DOME, SWITCH BOX
O/F	OPTICAL FIBRE: LINE, PIT
W	WATER: PIPE, VALVE BOX, VALVE, HYDRANT
GAS	GAS: PIPE, VALVE
S	SEWER: PIPE, PIT, MH
OHP	OVERHEAD POWER: CABLE, POWER POLE, STAY POLE, STAY WIRE
	CADASTRAL BOUNDARY
	SURVEY CONTOUR (0.1m, 0.5m)
	DESIGN CONTOUR (0.1m, 0.5m)
	DESIGN LEVEL
	EXISTING LINEMARKING
	EXISTING KERB
	EXISTING FOOTPATH
	PROPOSED FAUX BRICK INFILL
	PROPOSED ROAD PAVEMENT CONSTRUCTION
	PROPOSED ASPHALT MILL & FILL
	PROPOSED LINEMARKING
	PROPOSED KERB (PROFILE DEFINED BY TEXT): BARRIER, SEMI-MOUNTABLE, MOUNTABLE, FLUSH, TRANSITION
	PROPOSED SIGN, EXISTING SIGN
	EXISTING TREE
	LIGHT POLE: EXISTING, PROPOSED
	PROPOSED DRAINAGE PITS: GP, SEP, JP, SEGP
	PROPOSED DRAINAGE PITS: BUBBLE UP= BU SOAKWELLS= SKW,
	PROPOSED DRAINAGE PIPE
	REDUNDANT ROAD PAVEMENT TO BE REMOVED. REFER NOTE 14


NOTES

- THIS DRAWING USES AUSTRALIAN HEIGHT DATUM AND PERTH COASTAL GRID COORDINATES.
- LOCATE ALL LEVELS FROM EXISTING SURVEY MARKS.
- ALL SURVEY MARKS ARE TO BE PROTECTED.
- SERVICES SUCH AS SEWER, WATER, GAS, TELEPHONE, ELECTRICITY, OPTICAL FIBRE AND DRAINAGE MAY BE ENCOUNTERED DURING CONSTRUCTION OF WORKS. SERVICES INFORMATION SHOWN ON DRAWINGS IS INDICATIVE ONLY. THE LOCATION OF ALL AFFECTED SERVICES SHALL BE OBTAINED FROM RELEVANT AUTHORITIES AND LOCATED BY TEST HOLES ON SITE PRIOR TO CONSTRUCTION WITH ANY CONFLICTS TO BE REPORTED TO THE DESIGNER IMMEDIATELY.
- KERBING TO BE INSTALLED BY TYPE AS PER ADJACENT DETAIL.
- TRANSITION BETWEEN DIFFERENT KERB TYPES SHALL BE MADE OVER A NOMINAL LENGTH OF 2.0m
- CONCRETE WORK TO USE N32 STRENGTH GRADE FOR 32MPa COMPRESSIVE STRENGTH AT 28 DAYS.
- MAINTAIN THE SITE IN A SAFE CONDITION FOR ALL ROAD USERS. THIS MAY REQUIRE THE APPROPRIATE USE OF TEMPORARY SIGNING AND PAVEMENT MARKING UNTIL THE PERMANENT SIGNS AND PAVEMENT MARKING IS INSTALLED.
- VERGES TO BE REINSTATED UPON WORKS COMPLETION. INCLUDING ALL RETICULATION AS REQUIRED.
- RAMPS TO BE BUILT AS PER TYPE SPECIFIED ON PLAN. REFER TO MRWA DRAWING 9831-5649 FOR RAMP TYPE DETAILS.
- TACTILE PAVERS TO BE INSTALLED IN ACCORDANCE WITH AS1428.
- ALL CONNECTIONS TO EXISTING WORK SHALL BE SMOOTH AND OF NEAT APPEARANCE.
- FAUXBRICK TO BE RED IN CONTRAST WITH ADJACENT CONCRETE AND ASPHALT.
- REDUNDANT EXISTING PAVEMENT TO BE ENTIRELY REMOVED AND REPLACED WITH CLEAN FILL.



REVISIONS			
NO.	DESCRIPTION	DATE	SIGNED
A	ISSUED FOR REVIEW	29/03/23	BB
B	CHANGES AFTER REVIEW	14/04/23	BB

PROJECT	TOWNSEND RD BETWEEN CATO CT & BOON CT ROCKINGHAM BLISTER ISLAND
TITLE	LAYOUT PLAN

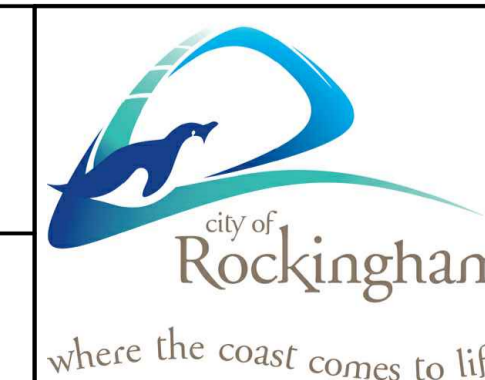

PO Box 2142
Rockingham DC,
WA 6169
Telephone (08) 9528 0333
Fax (08) 9592 1705

DESIGNED	BBENNETT	14/04/23
DRAWN	BBENNETT	14/04/23
CHECKED	XXX	--/--/--
APPROVED	XXX	--/--/--
DRAWING NO	03922-C5	REVISION
		B